
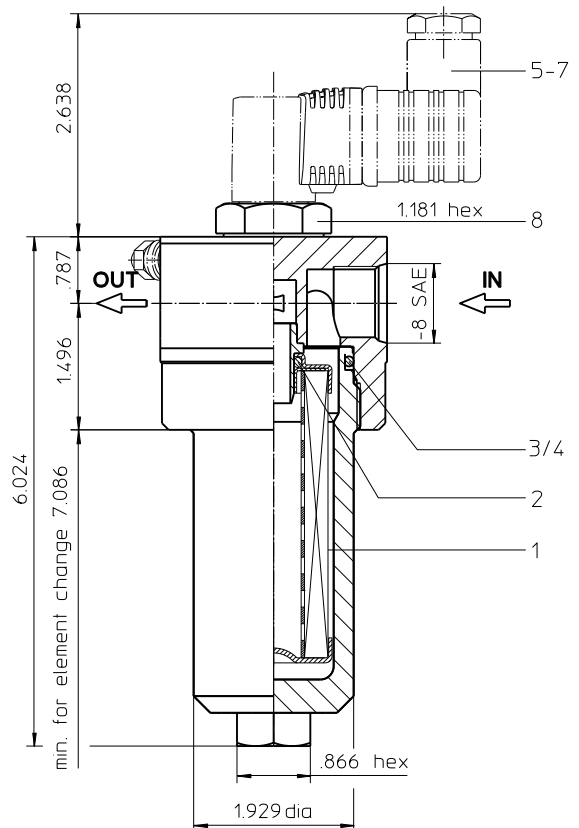
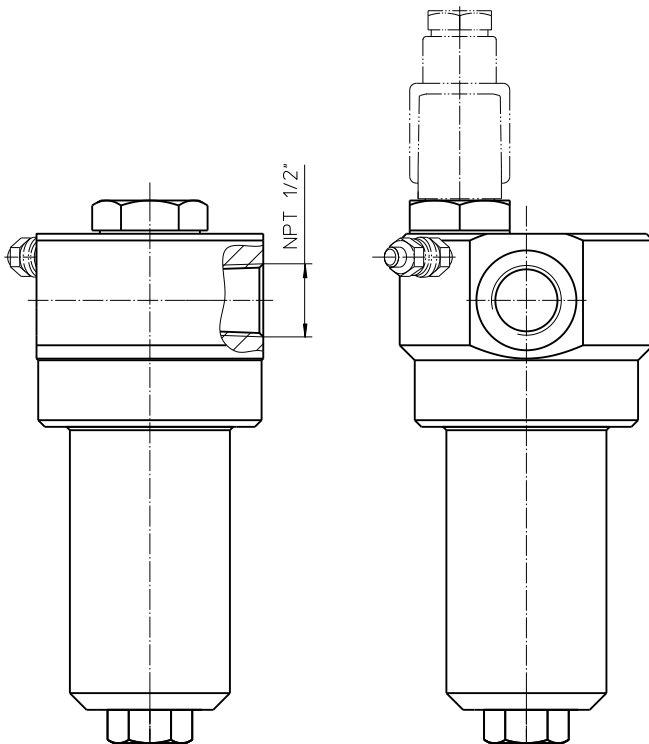


# Series EH 31

## 6000 PSI

1) Connection for the potential equalization, only for application in the explosive area.

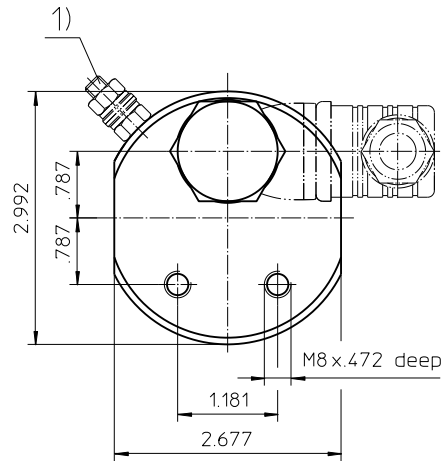

Weight: approx. 7 lbs.

Dimensions: inches

Designs and performance values are subject to change.



Powering Business Worldwide

# Pressure Filter

## Series EH 31

### 6000 PSI

#### Description:

Stainless steel pressure filter series EH 31 have a working pressure up to 6000 PSI. Pressure peaks can be absorbed with a sufficient safety margin. The EH-filter is in-line mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 5  $\mu\text{m}_{(c)}$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3526 PSI.

Eaton filter can be used for petroleum-based fluids, HW emulsions, water glycols, most synthetic fluids and lubrication fluids. Consult factory for specific fluid applications.

The internal valve is integrated into the filter head. After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

#### 1. Type index:

##### 1.1. Complete filter: (ordering example)

**EH. 31. 10VG. HR. E. P. VA. UG. 3. VA. - . - . AE**

|   |   |   |   |   |   |   |   |   |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|

- 1 series:**  
EH = stainless steel-pressure filter
- 2 nominal size:** 31
- 3 filter-material:**  
80G, 40G, 25G , stainless steel wire mesh  
25VG, 16VG, 10VG, 6VG, 3VG microglass
- 4 filter element collapse rating:**  
30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)
- 5 filter element design:**  
E = single-end open
- 6 sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 filter element specification:**  
- = standard  
VA = stainless steel
- 8 process connection:**  
UG = thread connection  
NPT = thread connection according to ANSI B1.20.1
- 9 process connection size:**  
3 = -8 SAE or NPT 1/2"
- 10 filter housing specification:**  
VA = stainless steel
- 11 specification pressure vessel:**  
- = standard (PED 2014/68/EU)  
IS20 = ASME VIII Div.1 with ASME equivalent material, see sheet-no. 55217 (max. operating pressure 4060 PSI)
- 12 internal valve:**  
- = without  
S1 = with by-pass valve  $\Delta p$  51 PSI  
S2 = with by-pass valve  $\Delta p$  102 PSI
- 13 clogging indicator or clogging sensor:**  
- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electric, see sheet-no. 1615  
VS5 = electronic, see sheet-no. 1619

To add an indicator/sensor to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

##### 1.2. Filter element: (ordering example)

**01E. 30. 10VG. HR. E. P. VA**

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

- 1 series:**  
01E. = filter element according to company standard
- 2 nominal size:** 30
- 3 - 7** see type index-complete filter

## Technical data:

|                                  |  |
|----------------------------------|--|
| operating temperature:           | +14 °F to +212 °F  |
| operating medium                 | mineral oil, other media on request                      |
| max. operating pressure:         | 6000 PSI   |
| test pressure:                   | 8700 PSI   |
| max. operating pressure at IS20: | 4060 PSI   |
| test pressure at IS20:           | 5278PSI  |
| process connection:              | manifold mounted   |
| housing material:                | EN10088-1.4571 (316 Ti according to AISI)                |
| sealing material:                | Nitrile (NBR) or Viton (FPM), other materials on request |
| installation position:           | vertical   |
| volume tank:                     | .03 Gal.   |

Classified under the Pressure Equipment Directive 2014/68/EU for mineral oil (fluid group 2), Article 4, Para. 3.  
 Classified under ATEX Directive 2014/34/EU according to specific application (see questionnaire sheet-no. 34279-4).

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) \text{ - characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times v (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eaton.com/hydraulic-filter-evaluation](http://www.eaton.com/hydraulic-filter-evaluation)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in psi/gpm apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


| EH | VG     |       |       |       |       | G      |        |        |
|----|--------|-------|-------|-------|-------|--------|--------|--------|
|    | 3VG    | 6VG   | 10VG  | 16VG  | 25VG  | 25G    | 40G    | 80G    |
| 31 | 12.554 | 8.716 | 5.580 | 4.794 | 3.275 | 0.2539 | 0.2369 | 0.1623 |

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

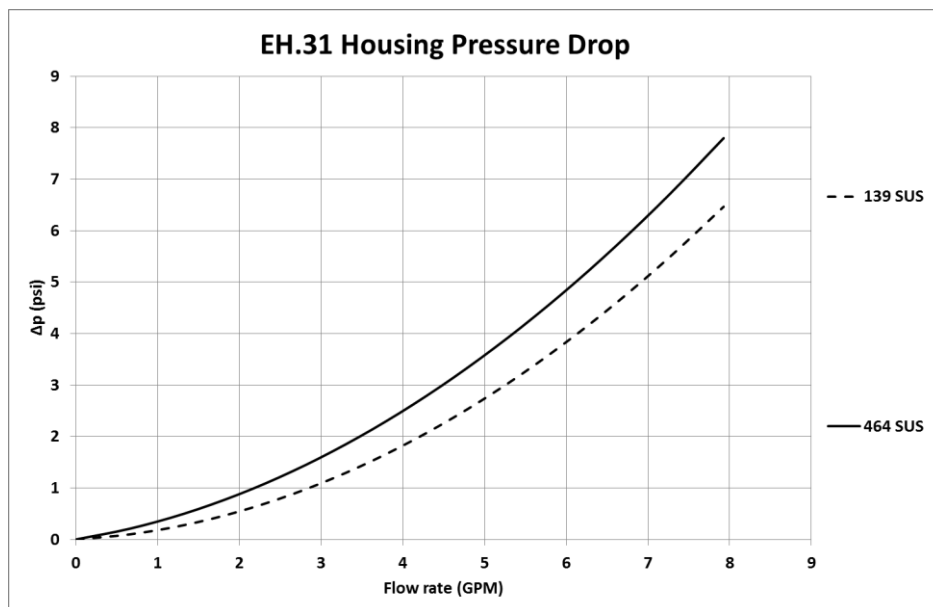

## Symbols:

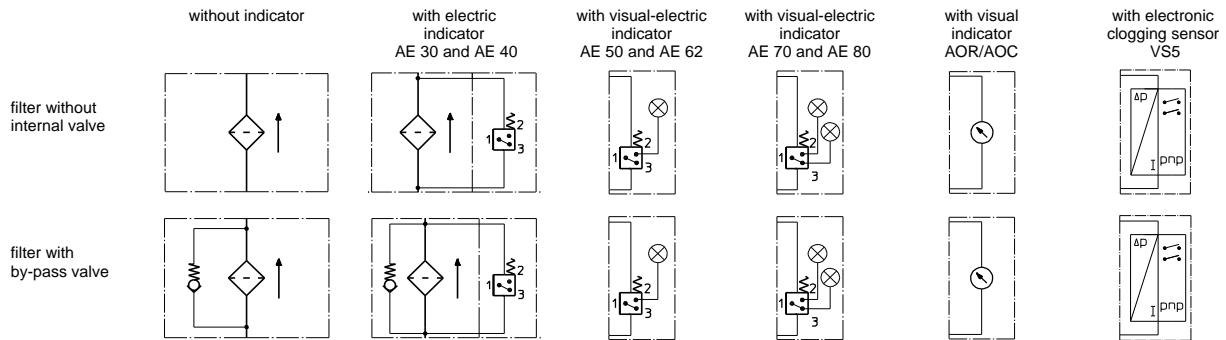

## Spare parts:

| item | qty. | designation                         | dimension    | article-no.                 |
|------|------|-------------------------------------|--------------|-----------------------------|
| 1    | 1    | filter element                      | 01E.30....   |                             |
| 2    | 1    | O-ring                              | 11 x 3       | 312603 (NBR)   312727 (FPM) |
| 3    | 1    | O-ring                              | 42 x 3,5     | 329381 (NBR)   338204 (FPM) |
| 4    | 1    | support ring                        | 48 x 2,6 x 1 | 305391                      |
| 5    | 1    | clogging indicator, visual          | AOR or AOC   | see sheet-no. 1606          |
| 6    | 1    | clogging indicator, visual-electric | AE           | see sheet-no. 1615          |
| 7    | 1    | clogging sensor, electronic         | VS5          | see sheet-no. 1619          |
| 8    | 1    | screw plug                          | 20913-4      | 314442                      |

item 8 only with execution without clogging indicator and clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

|           |   |
|-----------|---|
| ISO 2941  | Verification of collapse/burst resistance               |
| ISO 2942  | Verification of fabrication integrity                   |
| ISO 2943  | Verification of material compatibility with fluids      |
| ISO 3723  | Method for end load test                                |
| ISO 3724  | Verification of flow fatigue characteristics            |
| ISO 3968  | Evaluation of pressure drop versus flow characteristics |
| ISO 16889 | Multi-pass method for evaluating filtration performance |

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**Greater China**  
No. 7, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Asia-Pacific**  
100G Pasir Panjang Road  
#07-08 Interlocal Centre  
Singapore 118523  
Tel: +65 6825-1668

**For more information, please  
email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

© 2021 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.