


# PRESSURE FILTER, manifold mounted

## Series HPF 60 - 450 4568 PSI

Sheet No.  
**1473 Q**

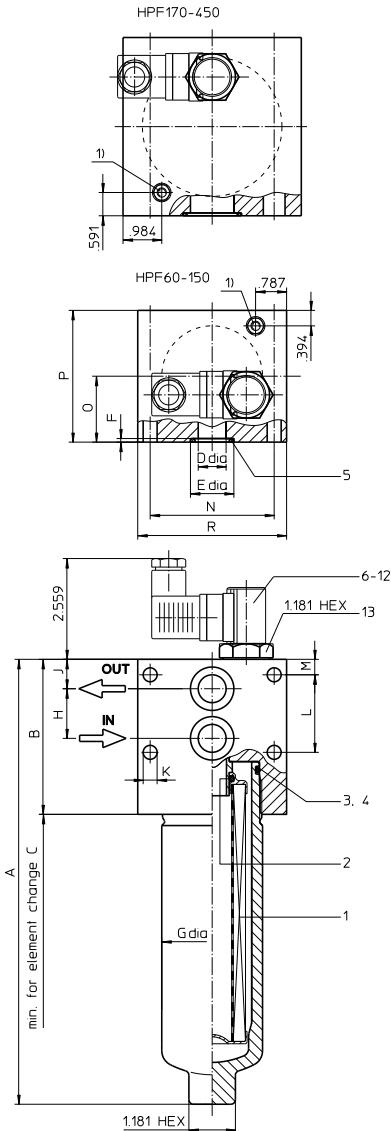

1) connection for the potential equalisation, only for application in the explosive area

### 2. Dimensions: inch

type	HPF 60	HPF 90	HPF 150	HPF 170	HPF 240	HPF 360	HPF 450
connection	3/4"	3/4"	3/4"	1"	1"	1"	1"
A	8.58	11.14	15.43	12.99	14.96	18.11	22.24
B	3.78	3.78	3.78	5.51	5.51	5.51	5.51
C	10.63	13.19	17.52	13.78	15.75	18.90	23.03
D	0.71	0.71	0.71	1.10	1.10	1.10	1.10
E	1.10	1.10	1.10	1.50	1.50	1.50	1.50
F	0.09	0.09	0.09	0.07	0.07	0.07	0.07
G	2.55	2.55	2.55	3.54	3.54	3.54	3.54
H	1.26	1.26	1.26	1.73	1.73	1.73	1.73
J	0.75	0.75	0.75	1.10	1.10	1.10	1.10
K	0.35	0.35	0.35	0.55	0.55	0.55	0.55
L	1.97	1.97	1.97	1.73	1.73	1.73	1.73
M	0.39	0.39	0.39	1.10	1.10	1.10	1.10
N	3.15	3.15	3.15	3.15	3.15	3.15	3.15
O	1.67	1.67	1.67	2.26	2.26	2.26	2.26
P	3.35	3.35	3.35	4.52	4.52	4.52	4.52
R	3.78	3.78	3.78	4.52	4.52	4.52	4.52
weight lbs.	12.1	13.2	15.4	37.4	39.6	44.0	50.6
volume tank	.08 Gal.	.10 Gal.	.16 Gal.	.18 Gal.	.23 Gal.	.31 Gal.	.42 Gal.

### 1. Type index:

#### 1.1. Complete filter: (ordering example)

**HPF. 90. 10VG. HR. E. P. -. F. 4. -. -. AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

- 1 **series:**  
HPF = pressure filter, manifold mounted
- 2 **nominal size:** 60, 90, 150, 170, 240, 360, 450
- 3 **filter-material and filter-fineness:**  
80 G = 80  $\mu\text{m}$ , 40 G = 40  $\mu\text{m}$ , 25 G = 25  $\mu\text{m}$   
stainless steel wire mesh  
25 VG = 20  $\mu\text{m}_{(c)}$ , 16 VG = 15  $\mu\text{m}_{(c)}$ , 10 VG = 10  $\mu\text{m}_{(c)}$ ,  
6 VG = 7  $\mu\text{m}_{(c)}$ , 3 VG = 5  $\mu\text{m}_{(c)}$  Interpor fleece (glass fiber)
- 4 **resistance of pressure difference for filter element:**  
30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)
- 5 **filter element design:**  
E = single-end open
- 6 **sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 **filter element specification:** (see catalog)  
- = standard  
VA = stainless steel  
IS06 = see sheet-no. 31601
- 8 **connection:**  
F = manifold mounted
- 9 **connection size:**  
4 = 3/4" (HPF 60-150)  
5 = 1" (HPF 170-450)
- 10 **filter housing specification:** (see catalog)  
- = standard  
IS06 = see sheet-no. 31605
- 11 **internal valve:**  
- = without  
S1 = with by-pass valve  $\Delta p$  51 PSI  
S2 = with by-pass valve  $\Delta p$  102 PSI  
R = reversing valve, Q  $\leq$  18.50 GPM (HPF 60-150)  
Q  $\leq$  55.75 GPM (HPF 170-450)
- 12 **clogging indicator or clogging sensor:**  
- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electrical, see sheet-no. 1615  
VS1 = electrical, see sheet-no. 1617  
VS2 = electrical, see sheet-no. 1618

#### 1.2. Filter element: (ordering example)

**01E. 90. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 **series:**  
01E. = filter element according to company standard
- 2 **nominal size:** 60, 90, 150, 170, 240, 360, 450
- 3 - 7 see type index-complete filter

EDV 08/12

Changes of measures and design are subject to alteration!

### 3. Spare parts:

item	qty.	designation	dimension and article-no.	
			HPF 60-150	HPF 170-450
1	1	filter element	01E. 60 - 01E. 150	01E. 170 - 01E.450
2	1	O-Ring	22 x 3,5 304341 (NBR) 304392 (FPM)	34 x 3,5 304338 (NBR) 304730 (FPM)
3	1	O-Ring	54 x 3 304657 (NBR) 304720 (FPM)	75 x 3 302215 (NBR) 304729 (FPM)
4	1	support ring	61 x 2,6 x 1 304660	81 x 2,6 x 1 304581
5	2	O-Ring	22 x 3 304387 (NBR) 304931 (FPM)	33,3 x 2,4 304380 (NBR) 314706 (FPM)
6	1	clogging indicator, visual	AOR or AOC see sheet-no. 1606	
7	1	clogging indicator, visual-electrical	AE see sheet-no. 1615	
8	1	clogging sensor, electrical	VS1 see sheet-no. 1617	
9	1	clogging sensor, electrical	VS2 see sheet-no. 1618	
10	1	O-Ring	15 x 1,5 315357 (NBR) 315427 (FPM)	
11	1	O-Ring	22 x 2 304708 (NBR) 304721 (FPM)	
12	1	O-Ring	14 x 2 304342 (NBR) 304722 (FPM)	
13	1	srew plug	20913-4	309817

item 13 execution only without clogging indicator or clogging sensor

### 4. Description:

Pressure filter of the series HPF are suitable for a working pressure up to 4568 PSI.

The pressure peaks are absorbed by a sufficient margin of safety. The HPF-filters are flanged to the mounting-surface.

The filter element consist of star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to the inside. Filter elements are available down to 4  $\mu\text{m}_{(c)}$ .

Internormen Product Line filter elements are known as elements with a high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Internormen Product Line filter are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Internormen Product Line filter elements are available up to a pressure difference resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The internal valves are integrated into the centering pivot for the filter element.

After reaching the opening pressure the by-pass valve causes that an unfiltered partial flow passes the filter. With the reverse valve a protection of the filter element is given when having a reverse flow inside the filter. The reverse flow will not be filtered.


### 5. Technical data:

temperature range:	+14°F to +176°F (for a short time +212°F)
operating medium:	mineral oil, other media on request
max. operating pressure:	4568 PSI
test pressure:	6525 PSI
connection system:	manifold mounted
housing material:	C-steel
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical

Classified under the Pressure Equipment Directive 97/23/EC for mineral oil (fluid group 2), Article 3, Para. 3.

Classified under ATEX Directive 94/9/EC according to specific application (see questionnaire sheet-no. 34279-4).

### 6. Symbols:

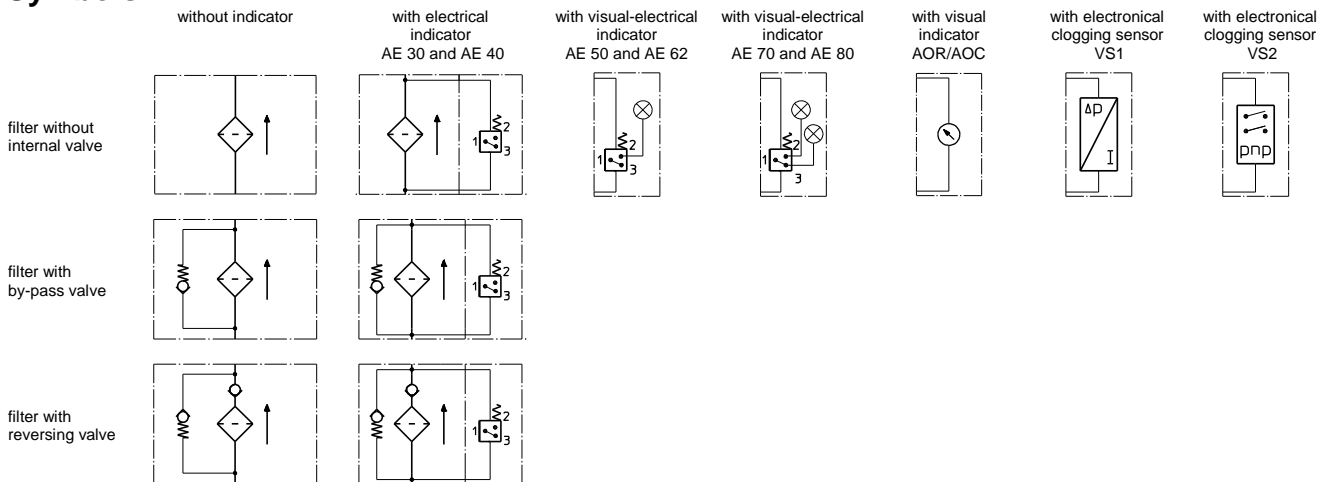

**7. Pressure drop flow curves:** Precise flow rates see 'Interactive Product Specifier', respectively  $\Delta p$ -curves; depending on filter fineness and viscosity.

### 8. Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance